



Module Temperature Sensor

The Module Temperature Sensor is part of the SEVEN meteorological sensor range, which includes professional and intelligent measuring sensors with a digital or analog interface for environmental and industrial applications such as PV plants.

It is a measuring transmitter used for the measurement of the PV module temperature. PT1000 is either encapsulated with ABS plastic injection or laminated between EVA film and a Tedlar backsheets. It is attached to the back of the module with a 3M® tape placed on the sensor. This specially chosen tape provides a safe attachment of the PT1000 to the module.

The measured module temperature data are transmitted as analog or digital output signals to the data loggers and receiver units according to the input requirements.

SEVEN products use reliable and high-quality components to provide accurate meteorological information in environmental and industrial applications.

This product is specifically designed according to the requirements of PV plant monitoring systems, in compliance with IEC 60751:2022 and IEC 61724-1:2021 Annex B.

Benefits and Features

- High Accuracy
- Ultralight Design for Better Attachment
- Fast & Simple to Install
- Low Power Consumption
- Smaller Than 10% of a Single Cell Area on the Panel
- SEVEN Remote Setup Service
- SEVEN Customer Support
- 2 Years Warranty

Models

3S-MT-PT1000

It is a measuring transmitter with PT1000 output used for the measurement of the PV module temperature. The measured values are transmitted as ohmic resistance signals. It can be connected to SEVEN Irradiance Sensor or Sensor Box models with a 5-pin connector with IP 67 protection class. It can also be directly connected to data loggers and other receiving units with compatible inputs.



3S-MT-PT1000-I

Module temperature sensors with analog 4-20 mA output are specially designed for advanced environmental conditions. The PV module temperature is detected by a high precision PT1000 sensor and converted to analog 4-20 mA output with an electronic card placed in UV resistant and high protection box.



3S-MT-PT1000-U

Module temperature sensors with analog 0-10 V output are specially designed for advanced environmental conditions. The PV module temperature is detected by a high precision PT1000 sensor and converted to analog 0-10 V output with an electronic card placed in UV resistant and high protection box.



3S-MT-PT1000-MB

Professional and intelligent measuring sensors with a digital interface for environmental and industrial applications such as PV plants. The measured value can be transmitted to monitoring instruments, data loggers and other receiving units via the serial RS485 interface with MODBUS RTU protocol.



3S-MT-PT1000

Module Temperature Sensor




Technical Specifications

	3S-MT-PT1000	3S-MT-PT1000-MB	3S-MT-PT1000-I	3S-MT-PT1000-U			
Sensor Type	PT1000						
Measuring Range	-40°C to +85°C						
Accuracy	±0.1°C						
Resolution	0.1°C						
Data Output	PT1000	RS485 up to 38400 Baud	Analog 4-20 mA	Analog 0-10 V			
Communication Protocol	-	Modbus RTU	-	-			
Power Supply	-	12 to 30 V DC					
Power Consumption	-	15 mA @ 24 V DC	30 mA @ 24 V DC	15 mA @24 V DC			
Electrical Connection	3 m 2x2x0,22 m ² 24 AWG, Li2YC11Y-TP PUR Cable, UV and Weather Resistant	50 cm 2x2x0,22 mm ² , 24 AWG, Li2YC11Y-TP PUR Cable and 2,5 m 3x2x0,22 mm ² , 24 AWG, Li2YC11Y-TP PUR Cable, UV and Weather Resistant	3 m 2x2x0,22 mm ² , 24 AWG, Li2YC11Y-TP PUR Cable, UV and Weather Resistant				
Operating Temperature Range	-40°C to +85°C						
Box Dimensions	-	80 mm x 82 mm x 55 mm (W x L x H)	64 mm x 68 mm x 35 mm (W x L x H)	65 mm x 115 mm x 55 mm (W x L x H)			
Sensor Cover Dimensions	Ø 33 mm x 3,5 mm Plastic model Ø 35 mm x 2 mm EVA model						
Weight	167 gr	280 gr	257 gr	267 gr			
IP Rating	IP 67						
Box Material	-	ABS*					
Sensor Cover	Laminated Backsheet (EVA - Tedlar) / ABS Plastic Injection						
Mounting Method	3M® Tape to Back of Module						
Standard	Class A according to IEC 60751:2022 and IEC 61724-1:2021						
Origin	TÜRKİYE						

*Since this product contains plastic parts, color changes may occur when exposed to direct sunlight.


EVA Model Technical Drawing

Technical Drawing of 3S-MT-PT1000, 3S-MT-PT1000-I, 3S-MT-PT1000-U, 3S-MT-PT1000-MB

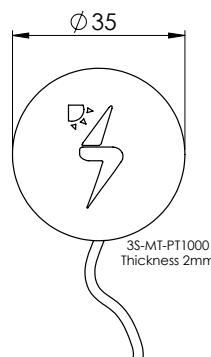

ABS Plastic Model Technical Drawing


Technical Drawing of 3S-MT-PT1000, 3S-MT-PT1000-I, 3S-MT-PT1000-U, 3S-MT-PT1000-MB

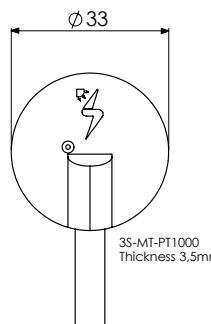

3S-MT-PT1000


Module Temperature Sensor

PT1000-MB Box Technical Drawing

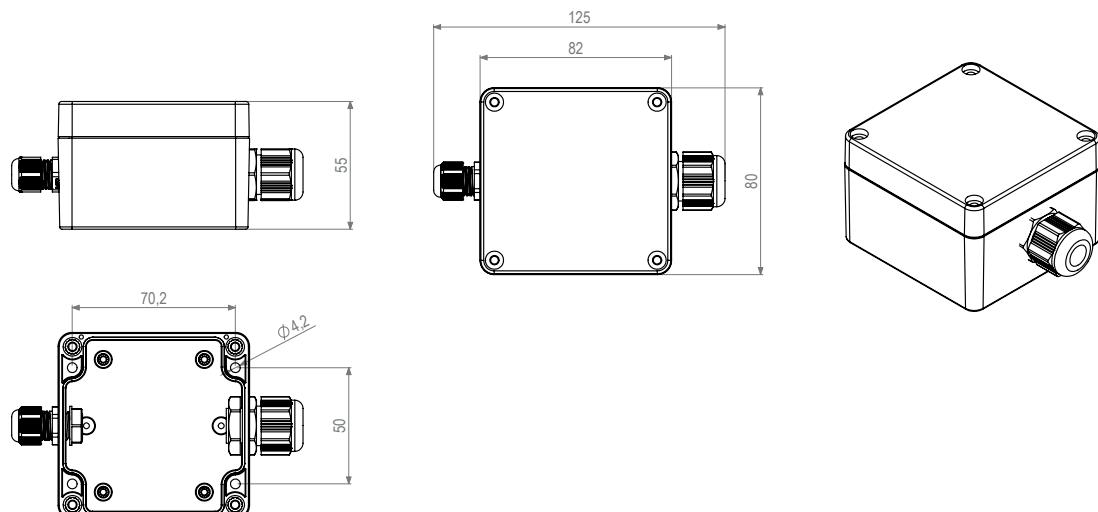


Note: All dimensions are in mm.

PT1000-I Box Technical Drawing

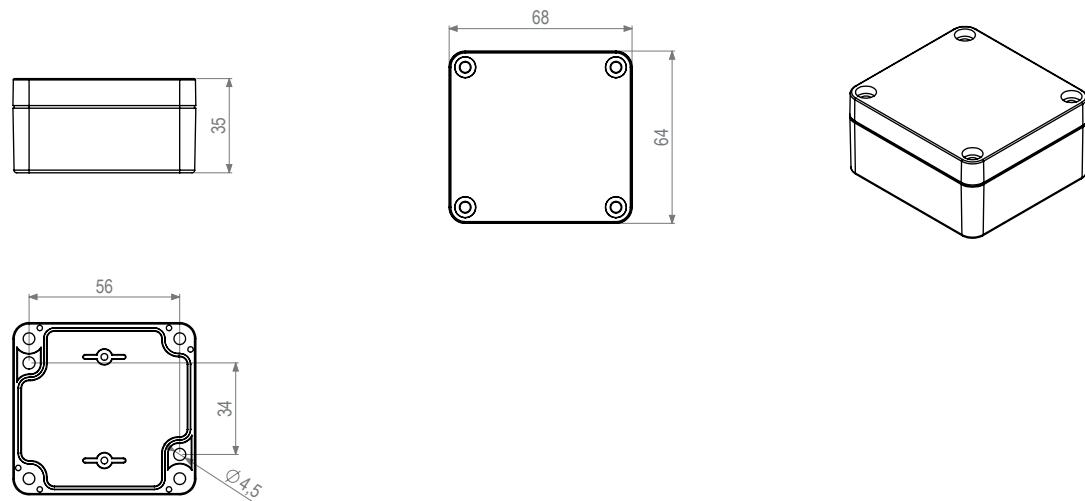

Note: All dimensions are in mm.

PT1000-U Box Technical Drawing

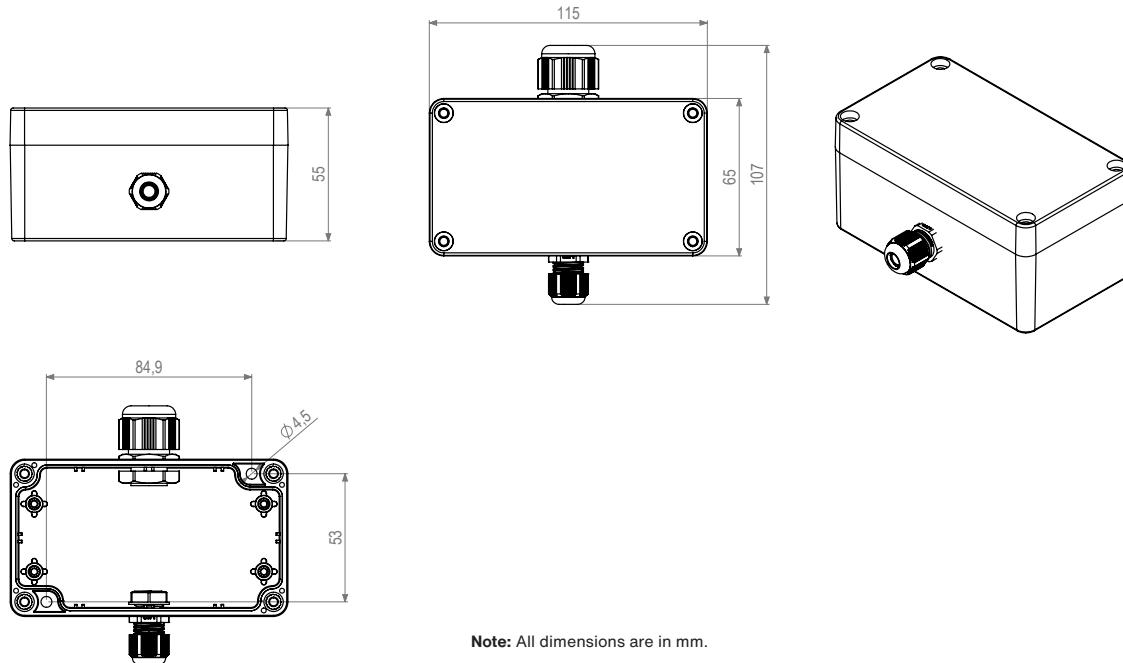

Note: All dimensions are in mm.

*** SEVEN has the right to make modifications on this documentation without notice.