

Product Information

Flow switch HR2VK2



- Optimized for use with oil
- Viscosity stabilised
- Solid construction

Characteristics

Mechanical flow switch for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

Materials (wetted)	<i>Brass construction:</i> CW614N nickelated, CW614N, 1.4305, 1.4310, hard ferrite	<i>Stainless steel construction:</i> 1.4571, 1.4310, hard ferrite
Materials (non-wetted)	CW614N nickelated, PC, 1.4301,	
Weight	see table "Dimensions and weights"	
Installation location	Standard: horizontal inwards flow from the left; other installation positions are possible; the installation position affects the switching point and range.	

Ranges


For switching ranges, the details in the table correspond to horizontal inwards flow and decreasing flow rate; for display ranges they correspond to horizontal inwards flow and increasing flow rate.

Switching range l/min oil 30-330 mm ² /s	Display range l/min oil 30-330 mm ² /s	Q _{max.} Recom- mended l/min	Pressure loss bar at Q _{max.} oil
10 - 25	10 - 60	100	4
15 - 40	20 - 100	120	5
40 - 70	40 - 120	140	5
50 - 100	50 - 150	160	7


Special ranges are available.

Reference Data:

Pressure drop (Pa) to Flow (Q)

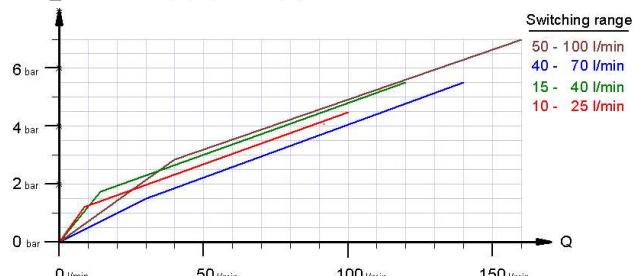


Technical data

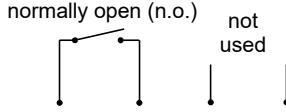Switch	reed switch
Nominal width	DN 32 / 40 / 50
Process connection	female thread G 1 1/4..G 2 (further process connections available on request)
Switching range	10...100 l/min
Pressure loss	~ 4...7 bar at Q _{max.}
Q_{max.}	up to 160 l/min
Tolerance	±10 % of full scale value at constant viscosity
Viscosity-stability	mean deviation ±7 %, max. 18 % (30-330 mm ² /s) of full scale value
Compressive strength	PS 200
Media temperature	-20...+120 °C
Ambient temperature	-20...+70 °C
Media	oil
Wiring	No. 0.378 normally open (n.o.) 
Switching voltage	max. 230 V AC
Switching current	max. 0.5 A
Switch performance	max. 50 VA
Protection class	2 - Safety insulation
Ingress protection	IP 67
Electrical connection	for round plug connector M12x1, 4-pole

Product Information

Dimensions and weights

DN	G	Types	L	ØD	SW	Ød	X	Weight kg
32	G 1 1/4	HR2VK2-032GM	130	65	60	51	23	2.6
						56	24	3.2
50	G 2	HR2VK2-050GM	185	80	75	70	26	5.3

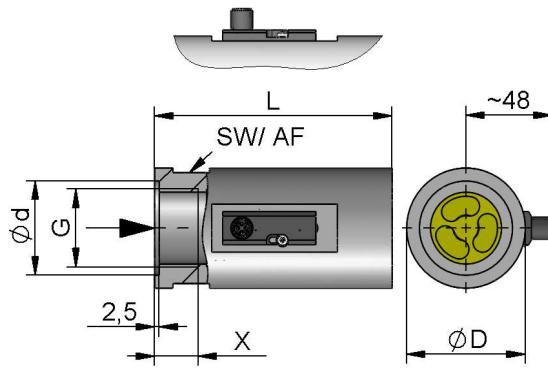

additional weights for options

Display O1 / Z1 0.05 kg


Handling and Operation

Note

- Include straight calming section of 5 x DN in inlet and outlet
- If the media are dirty, install a filter (use magnetic filter for ferritic components).
- It must be ensured that the values given for voltage, current, and power are not exceeded.
- When switched on, a load must be connected in series.
- Under unfavorable pressure conditions, e.g. with a free outlet, there is a risk of cavitation.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.

Adjustment

If it is necessary to adjust the switching value, the switching head can be adjusted lengthways. When the switching value is reached, the switching unit is fixed in place by a fastening bolt.

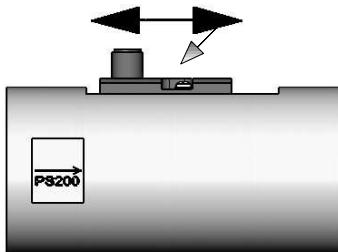

Ordering code

HR2VK2

1. Display options

- no mechanical display
- O1- with measurement display at side O1
- Z1- with frontal measurement display Z1



HR2VK2O1-

2. Nominal width

- 032 DN 32 - G 1 1/4
- 040 DN 40 - G 1 1/2
- 050 DN 50 - G 2



HR2VK2Z1-

3. Process connection

- G female thread

4. Connection material

- M brass
- K stainless steel

5. Switching range oil for horizontal inwards flow

- 025 10 - 25 l/min
- 040 15 - 40 l/min
- 070 40 - 70 l/min
- 100 50 - 100 l/min

Options

- Special values
- two to four switching heads

Ordering information

- Specify direction of flow, medium, and switching range.