

Product Information

HR2VO1-032..050

Flow switch HR2VO1



- Viscosity stabilised
- Individually calibrated display
- Compact design

Characteristics

Mechanical flow switch for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

Technical data

Switch	without	
Nominal width	DN 32 / 40 / 50	
Process connection	female thread G 1 ¹ / ₄ ..G 2 (further process connections available on request)	
Display range	10...150 l/min	for details see table "Ranges"
Pressure loss	~ 4...7 bar at Q _{max}	
Q _{max.}	up to 160 l/min	
Tolerance	±10 % of full scale value at constant viscosity	
Viscosity-stability	mean deviation ±7 %, max. 18 % (30-330 mm²/s) of full scale value	
Compressive strength	PS 200	
Media temperature	-20...+120 °C	
Ambient temperature	-20...+70 °C	
Media	oil	
Electrical connection	none	
Materials (wetted)	Brass construction: CW614N nickelled, CW614N, 1.4305, 1.4310, hard ferrite	Stainless steel construction: 1.4571, 1.4310, hard ferrite
Materials (non-wetted)	CW614N nickelled, PC, acrylic	
Weight	see table "Dimensions and weights"	
Installation location	Standard: horizontal inwards flow from the left; other installation positions are possible; the installation position affects the switching point and range.	


Ranges

Details in the table correspond to horizontal inwards flow with increasing flow rate.

Display range l/min oil 30-330 mm ² /s	Q _{max.} Recom- mended l/min	Pressure loss bar at Q _{max.} oil
10 - 60	100	4
20 - 100	120	5
40 - 120	140	5
50 - 150	160	7


Special ranges are available.

Reference Data:

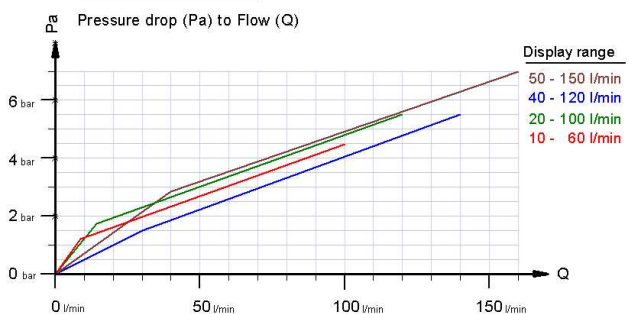

Dimensions and weights

DN	G	Types	L	ØD	SW	Ød	X	Weight kg
32	G 1 ¹ / ₄	HR2VO1-032GM	130	65	60	51	23	2.5
40	G 1 ¹ / ₂	HR2VO1-040GM	170	65	60	56	24	3.1
50	G 2	HR2VO1-050GM	185	80	75	70	26	5.2

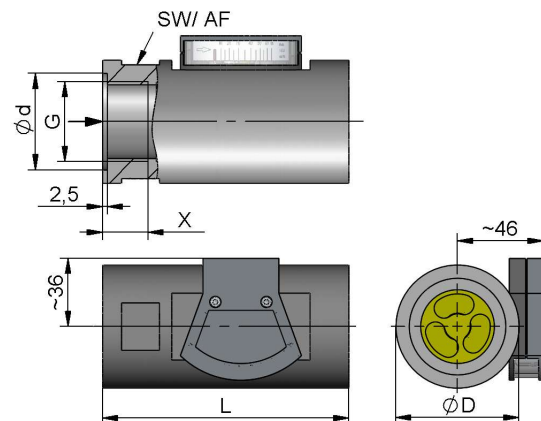

Product Information

HR2VO1-032..050

Handling and operation

Note

- Include straight calming section of 5 x DN in inlet and outlet
- If the media are dirty, install a filter (use magnetic filter for ferritic components).
- Under unfavorable pressure conditions, e.g. with a free outlet, there is a risk of cavitation.

Ordering code

HR2VO1 - 1. 2. 3. 4.

1.	Nominal width
032	DN 32 - G 1 ¹ / ₄
040	DN 40 - G 1 ¹ / ₂
050	DN 50 - G 2
2.	Process connection
G	female thread
3.	Connection material
M	brass
K	stainless steel
4.	Display range oil for horizontal inwards flow
060	10 - 60 l/min
100	20 - 100 l/min
120	40 - 120 l/min
150	50 - 150 l/min

Options

- Special values

Ordering information

- Specify direction of flow, medium, and display range.