

LABOPLUS-RRI

FLOW TRANSMITTER WITH IO-LINK

CHARACTERISTICS

The flow transmitters of the LABOPLUS-RRI series work with a paddlewheel that is set in rotation by the flowing medium. The speed of the rotor depends linearly on the flow rate. The PVDF rotor is fitted with stainless steel clamps (optionally titanium), which are detected by an inductive sensor located outside the flow chamber and thus enable the speed to be measured.

The rotor has a break-proof ceramic shaft that runs in durable special plastic bearings. The housing is made of PPS or alternatively PVDF if there are special requirements for chemical resistance. The PPS housing can be fitted with a transparent cover made of PSU, which allows visual inspection of the impeller, and the integrated electronics have an analog output and a switching output, which can alternatively be used as a frequency output. It also has an IO-Link interface that allows digital communication with the sensor for configuration and reading out measured values.

In addition to the version presented here, other versions are available:

OMNIPLUS-RRI with display and two switching outputs
RRI direct frequency output, not adjustable



 **IO-Link**

www.senseca.com



SMART TECHNOLOGY

- IO-Link-Interface



EASY TO SET UP & QUICK TO INSTALL

- Run-in and run-out sections are not necessary
- Plug-in and rotatable connections



ACCURATE & RELIABLE

- Long operating thanks to high quality ceramic axle and special plastic bearing



GREAT FLEXIBILITY


- Modular construction with various connection systems

Specifications


Meas. principle	Paddlewheel with metal clamps Detection with inductive sensor	
Nominal size	DN 10 (LABOPLUS-RRI-010) DN 25 (LABOPLUS-RRI-025)	
Mechanical Connection	female thread G 3/8, G 1 male thread G 3/8 A, G 1 A hose nozzle Ø11, Ø30 (other threaded, crimped, and plug-in connections, connections with constant flow rate device or limiters available on request)	
Measuring ranges	0.1...100 l/min (see table „ranges“)	
Measurement uncertainty	±3 % of the measured value	
Media	Water or other low-viscosity liquids	
Pressure loss	max. 0.5 bar	
Pressure resistance	PN 16	
Media temperature	0...+60 °C	
Storage temperature	-20...+80 °C	
Materials wetted with media	Housing	PPS (40 % GF) optional PVDF, PSU
	Rotor	PVDF
	Clamps	1.4310 (opt.: titanium)
	Bearing	Iglidur X
	Axle	Ceramics ZrO ₂ -TZP
	Gasket	FKM optional: NBR, EPDM
Supply voltage	18...30 V DC	
Current consumption	max. 200 mA	
IO-Link specification	IO-Link Revision	V1.1.3
	Bit rate	COM2 (38400 Bit/s)
	Minimum cycle time	20 ms
	SIO mode	yes
	Port class	A
	Block parameterisation	yes
	Data storage	yes
Analog output	Current:	4...20 mA 0...20 mA
	Voltage:	0...10 V 2...10 V 0...5 V 1...5 V 0.5...4.5 V
Switching outputs	Transistor outputs push-pull, parameterizable as NPN o.C. Short-circuit and reverse polarity resistant $I_{out} = 100 \text{ mA max.}$ Configurable on the device as <ul style="list-style-type: none"> • Limit switch • Frequency output • Pulse output • Signal output for preset counter 	
Electr. connection	M12x1 circular connector, 4-pin	
Protection class	IP65 / IP67	
Conformity	CE	
Gewicht	LABOPLUS-RRI-010	appr. 0.25 kg
	LABOPLUS-RRI-025	appr. 0.51 kg

Dimensions

LABOPLUS-RRI-010 model series

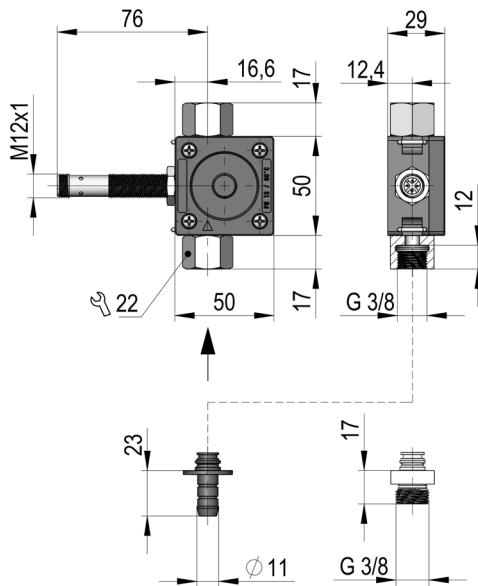


LABOPLUS-RRI-025 model series

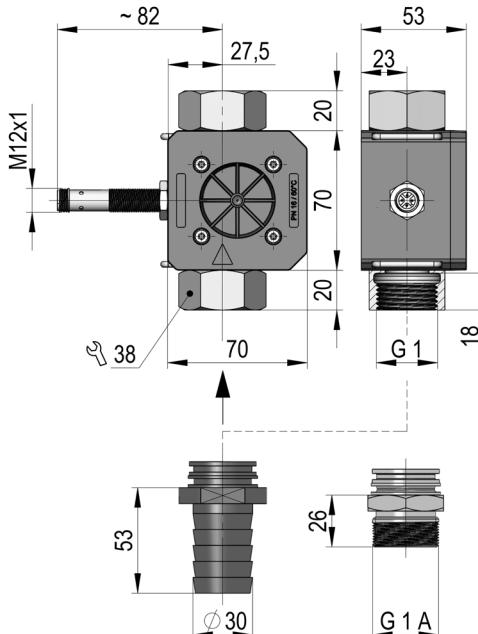

Ranges

Type	Range l/min (H ₂ O)	Q _{max} l/min (H ₂ O)
LABOPLUS-RRI-010...020	0.1... 1.5	1.8
LABOPLUS-RRI-010...050	0.2... 10.0	12.0
LABOPLUS-RRI-010...070	0.4... 12.0	14.4
LABOPLUS-RRI-025...080	2.0... 30.0	36.0
LABOPLUS-RRI-025...120	3.0... 60.0	72.0
LABOPLUS-RRI-025...160	4.0...100.0	120.0

Connection diagram

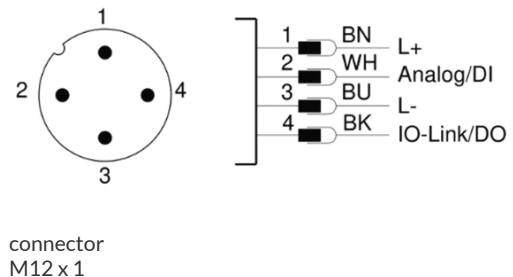

Order codes

1. 2. 3. 4. 5. 6. 7. 8.
LABOPLUS-RRI - **10**

● = Standard ○ = Option

1. Nominal width		
010	●	DN 10
025	●	DN 25
2. Mechanical connection		
G	●	female thread
A	○	male thread
T	○	hose nozzle
3. Connection material		
V	●	PVDF
M	○	CW614N nickelled
K	○	1.4305
4. Housing material		
Q	●	PPS
V	○	PVDF
A	○	PPS with transparent cover PSU
5. Inwards flow drilling		
020		Ø 2
050		Ø 5
070		Ø 7
080		Ø 8
120		Ø12
160		Ø16
6. Seal material		
V	●	FKM
E	○	EPDM
N	○	NBR
7. Rotor		
10		with 10 clamps
8. Material for clamps		
K	●	1.4310
T	○	titanium

Accessories

Cable with circular connector M12x1, 4-pin (not included)